

A GIS-MCE based model for forest road planning

E. ABDI¹, B. MAJNOUNIAN¹, A. DARVISHSEFAT¹, Z. MASHAYEKHI¹, J. SESSIONS²

¹*Faculty of Natural Resources, University of Tehran, Karaj, Iran*

²*Department of Forest Engineering, Oregon State University, Oregon, U.S.A.*

ABSTRACT: One of the cost factors in forest management is the development of road infrastructure. The objective of study was to develop a method using GIS and Multi-criteria Evaluation (MCE) to design a forest road network with the lowest construction cost while maintaining other technical requirements. Six road alternatives meeting technical requirements were developed using PEGGER. Then MCE was used to evaluate the construction costs of the candidate networks. The decision making group identified six factors as being relevant to the costs of forest roads. Then factors were compared in a pair-wise comparison, in the context of the Analytic Hierarchy Process to develop weights of map layers. Then weights and factors were entered into the MCE module to create a final suitability map. The total cost of each alternative was extracted from the suitability map and the unit cost of each alternative was calculated. The results showed that alternatives one and two had the highest and lowest unit costs, respectively. The results illustrated the utility of using GIS and MCE to improve the planning process.

Keywords: analytic hierarchy process; forest road; GIS; multi-criteria evaluation (MCE); PEGGER

Roads are essential structures to provide access to the forest from the establishment phase to the harvesting stage. Thus it is important that roads are properly planned in order to ensure the transport of forest products and safety, comfort and economy of vehicle operations (ABELI et al. 2000). Road planning and development for operational forest harvesting are an important component of the forest management process (MURRAY 1998). The planning of a road network to access timber harvest sites is a difficult and time-consuming task. By evaluating alternative routes in the office using available Geographic Information System (GIS) routines, days or even weeks of valuable field time can be saved and ultimately, a better design may emerge (ROGERS 2001, 2005). The viability and profitability of operational forest management plans is very much influenced by road costs as well as road network structure (KIRBY et al. 1986). Given the importance of these costs, finding cost effective paths for new road networks is highly desirable (DEAN 1997). Road networks are often developed by engineers using contour and thematic maps (LIU, SESSIONS 1993; ROGERS 2005; PICARD et al. 2006). Several automated procedures

using network techniques have been developed to improve road planning (CHUNG et al. 2004; EPSTEIN et al. 2006). With the popularity of GIS in natural resource management and increasing access of forest engineers to desktop GIS software, efforts are being made to integrate traditional road design techniques into GIS. The use of the PEGGER to identify pathways of acceptable road gradient is one such software (ROGERS 2001). In the case of forest roads several criteria may need to be evaluated to choose the best alternative. Such procedures are called Multi-criteria Evaluation (MCE). One of the most common procedures for multi-criteria evaluation is Weighted Linear Combination (WLC). WLC is straightforward in a raster GIS (EASTMAN 1995). Development of the relative importance of factors is an important stage. Although a variety of techniques exist for the development of weights, one of the most promising is that of pair-wise comparison developed by Saaty in the context of a decision-making process known as the Analytic Hierarchy Process (AHP) (EASTMAN 1995). In road planning different kinds of criteria often exist, particularly with environmental factors. COULTER et al. (2003) stated that AHP provides a

useful framework to provide quantitative measures of environmental benefits of forest road maintenance. Also COULTER et al. (2006) stated that AHP has the potential to provide a consistent approach to the ranking of forest road investments based on multiple criteria. AHP was specifically developed to provide a consistent, quantifiable approach to problems involving multi-criteria analysis. SHIBA (1995) used AHP to identify the benefit structure of a road network and showed that AHP is a particularly useful tool for resolving political, economic and environmental conflicts. The first introduction of this technique to a GIS application was that of RAO et al. (1991). In the procedure for MCE using a WLC it is necessary that the weights sum to one. In Saaty's technique, weights of this nature can be derived by taking the principal eigenvector of a square reciprocal matrix of pair-wise comparisons between the criteria. The comparison concerns the relative importance of the two criteria involved in determining suitability for the stated objective. Ratings are provided on a 9-point continuous scale. The magnitude of the decision makers' inconsistency in completing pair-wise comparisons is measured using a consistency ratio (CR). Saaty indicates that matrices with CR ratings greater than 0.1 should be re-evaluated

(EASTMAN 1995). The objective of this study was to develop a model to design and evaluate forest road networks with regard to technical requirements and costs using GIS and MCE. The process must integrate into existing desktop software, incorporate the knowledge of the road engineer and be simple and easy to understand and use.

MATERIALS AND METHODS

Study site

The study site is situated in Mazandaran province, south of the Caspian Sea, in Iran (latitude 36°29'N, longitude 50°33'E) (Fig. 1). The research was performed in Namkhane district, which covers 788 ha and has 22 compartments (excluding 5 protected compartments). The system of management is the selection system and is followed to ensure sustainable development and sustained yield. This region has a temperate climate and rainfall is distributed throughout the year. Elevation is 310 to 1,345 m above sea level and slope varies between 0 to 80%. The existing road density (RD) is 14.6 m/ha, which with regard to the selection management system is not sufficient (Iranian Plan and Budget Organization

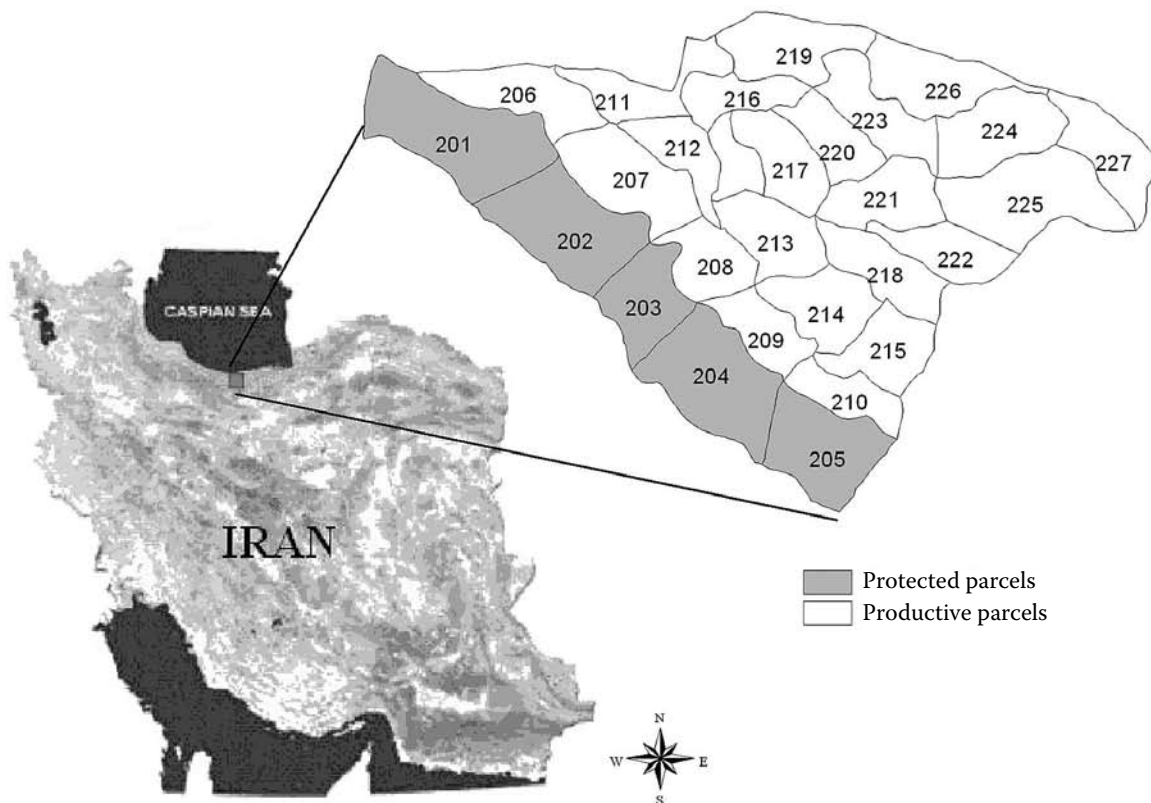


Fig. 1. Study area

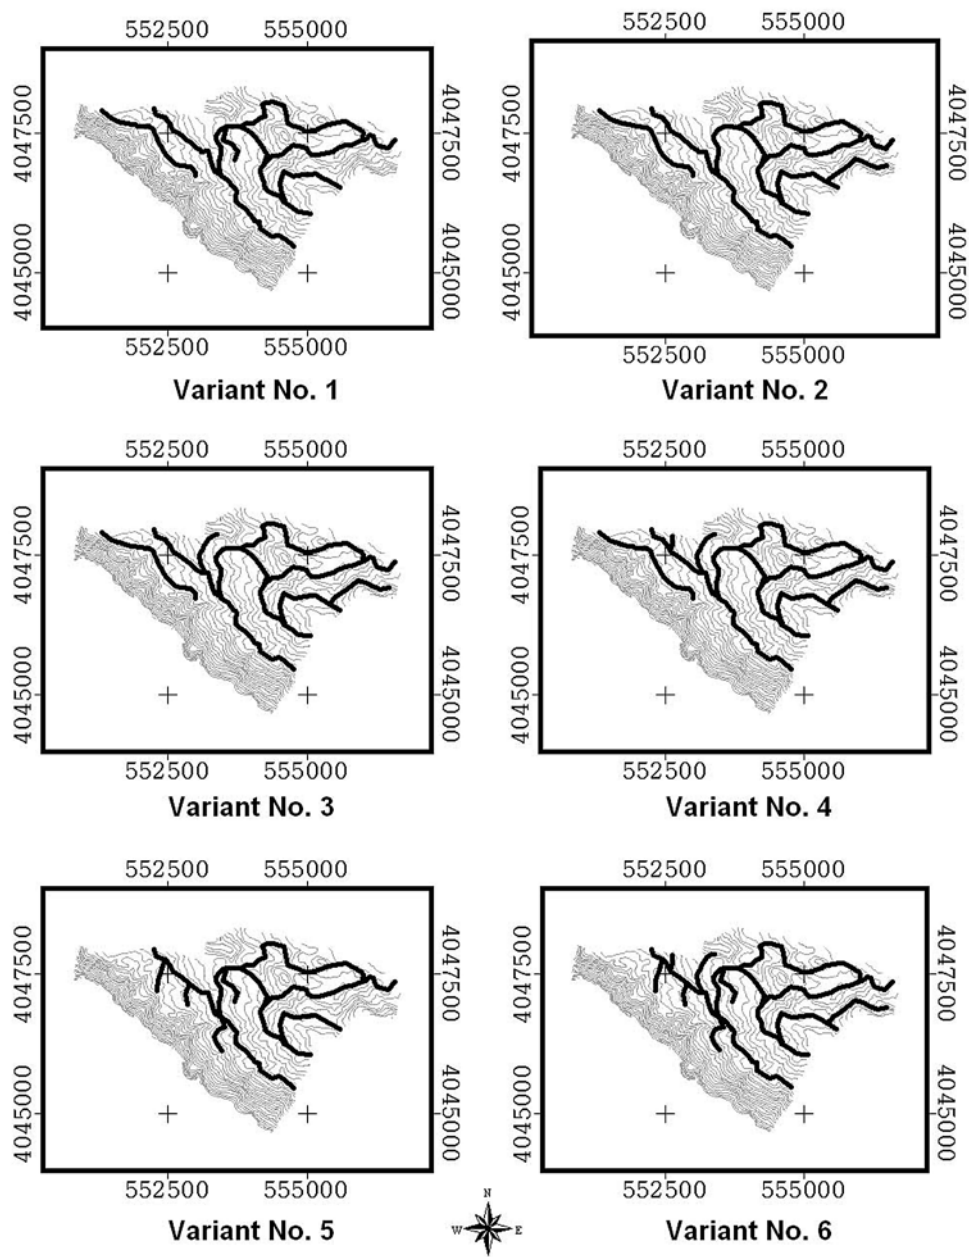


Fig. 2. Alternative road networks

2000), thus additional roads need to be designed and constructed.

METHOD

First, the contour line layer was extracted from 3D DGN files and was used to generate a digital elevation model and also to design road alternatives. The divider setting method was used for plotting a grade line on a contour map. The preliminary road corridors can be checked by this method on topographic maps (ELIAS 2001; ROGERS 2005). An ArcView GIS extension called PEGGER (ROGERS 2005), which automates the route projection, was used to design six road network alternatives with regard to forest road

standards. Then, MCE was used to evaluate the alternative road networks with regard to construction costs. The first step in multi-criteria evaluation was establishing the criteria. The decision-making group identified six factors as being relevant to forest road construction costs: slope, soil, geology, aspect, altitude and standing volume. There are other important factors, such as hydrologic condition, but their layers were not available so they were not included in the study. The factors were standardized to a consistent range of 1–5. In addition, all factor layers were developed so that low values would indicate more suitable areas. The next step was to establish a set of weights for each of the factors. The forest road engineers as a group of decision makers were asked to fill out a

Table 1. Calculated unit cost of road alternatives

Alternative	Total cost	Road length (km)	Unit cost
1	3,077.17	17.95	171.43
2	3,317.49	18.45	179.81
3	3,452.77	19.30	178.90
4	3,509.74	19.59	179.16
5	3,011.22	17.50	172.07
6	3,553.35	19.88	178.74

with regard to forest road standards. Mathematical programming models can include constraints to avoid infeasible gradients but they are more complex, and may not integrate the knowledge of the forest engineer.

CONCLUSION

This paper has presented a quantitative approach to selecting a forest road network using GIS and MCE. The capabilities of GIS in spatial analysis enable the planner to combine different factors and identify factors that may improve the results. The use of AHP permitted the derivation of relative weights. The method described here is good for initial planning. However, the results from the model depend upon data precision. Future work could incorporate environmental factors into the model. This would allow the manager to incorporate construction costs and environmental factors together in route evaluation and selection.

References

ABELI W.S., MEILUDIE O., KACHWELE R., 2000. Road alignment and gradient issues in the maintenance of logging roads in Tanzania. *International Journal of Forest Engineering*, 11: 22–29.

ACZEL J., SAATY T.L., 1983. Procedure for synthesizing ratio judgments. *Journal of Mathematical Psychology*, 27: 93–102.

CHUNG W., SESSIONS J., HEINIMANN H.R., 2004. An application of a heuristic network algorithm to cable logging layout design. *International Journal of Forest Engineering*, 15: 11–24.

COULTER E.D., SESSIONS J., MICHAEL W.G., 2003. Scheduling Forest Road Maintenance Using the Analytic Hierarchy Process and Heuristics. *Silva Fennica*, 40: 143–160.

COULTER E.D., COAKLEY J., SESSIONS J., 2006. The analytic hierarchy process: A tutorial for use in prioritizing

forest road investments to minimize environmental effects. *International Journal of Forest Engineering*, 17: 51–70.

DEAN D.J., 1997. Finding optimal routes for networks of harvest site access roads using GIS-based techniques. *Canadian Journal of Forest Resources*, 27: 11–22.

EASTMAN J.R., 1995. Decision Support. In: Idrisi for Windows: User's guide version 1.0. Clark Labs for Cartographic Technology and Geographic Analysis. Clark University, Worcester, Mass: 10.1.10.6.

ELIAS G.B., 2001. Guidelines for low impact forest roads. Bureau of Forest Management Project, Indonesian Ministry of Forestry: 47.

EPSTEIN R., WEINTRAUB A., SESSIONS J.B., SESSIONS J., SAPUNAR P., NETO E., 2006. A combinatorial heuristic approach for solving real size machinery location and road design problems in forestry planning. *Operations Research*, 54: 1017–1027.

HUANG B., LONG C.R., YONG S.L., 2003. GIS_AHP model for HAZMAT routing with security considerations. *IEEE 6th International Conference on Intelligent Transportation System*. Shanghai, IEEE ITS Council: 1–6.

IRANIAN PLAN, BUDGET ORGANIZATION, 2000. Forest road Project Guidelines No. 148. 2nd Ed. Office of the Deputy for Technical Affairs. Bureau of Technical Affairs and Standards. Iranian Plan and Budget Publication. (In Persian)

KIRBY M., HAGER W., WONG P., 1986. Simultaneous planning of wildland management and transportation alternatives. *Management Science and Studies*, 21: 371–387.

LIU K., SESSIONS J., 1993. Preliminary planning of road systems using digital terrain models. *International Journal of Forest Engineering*, 4: 27–32.

MURRAY A.T., 1998. Route planning for harvest site access. *Canadian Journal of Forest Research*, 28: 1084–1087.

MURTHY A.R., 2003. Selection of least cost paths for extraction of forest produce using remote sensing and GIS. *Map India Conference*. New Delhi, GIS Development: 1–9.

PICARD N., GAZULL L., FREYCON V., 2006. Finding optimal routes for harvesting tree access. *International Journal of Forest Engineering*, 17: 35–48.

RAO B.R., DWIVEDI R.S., VENKATARATNAM L., RAVISHANKAR T., THAMMAPPA S., BHARGAVA G., 1991. Mapping the magnitude of sodicity in part of the Indo-Gangetic plains of Uttar Pradesh, northern India using Landsat data. *International Journal of Remote Sensing*, 12: 419–425.

ROGERS L., 2001. PEGGER & ROADVIEW – A New GIS Tool To Assist Engineers in Operations Planning. *The International Mountain Logging and 11th Pacific Northwest Skyline Symposium*, Seattle, University of Washington: 177–182.

ROGERS L., 2005. Automating aontour-based route projection for preliminary forest road designs using GIS. [MS Thesis.] Washington, University of Washington: 87.

SAATY T.L., 2000. Fundamentals of Decision Making and Priority Theory with the Analytic Hierarchy Process. Vol. VI. The AHP. Pittsburgh, RWS Publications: 478.

SHIBA M., 1995. Analytic hierarchy process (AHP) based multi attribute benefit structure analysis of road network

system in mountainous rural areas of Japan. International Journal of Forest Engineering, 7: 14–50.

Received for publication June 5, 2008

Accepted after corrections November 27, 2008

GIS-MCE model pro plánování lesních cest

ABSTRAKT: Jedním z ekonomických faktorů lesního hospodářství je rozvoj infrastruktury cest. Cílem práce bylo vyvinout metodu plánování sítě lesních cest s využitím systému GIS spolu s multikriteriálním hodnocením (MCE) tak, aby došlo k minimalizaci nákladů na výstavbu a zároveň byly zachovány ostatní technické požadavky. Šest alternativ cest splňujících technické požadavky bylo vytvořeno pomocí nástroje PEGGER. Multikriteriální hodnocení bylo poté použito pro vyhodnocení cenových nároků na takto navrženou síť. Řešitelský tým identifikoval šest faktorů, které jsou pro cenu lesních cest relevantní. Tyto faktory byly poté hodnoceny pomocí párového porovnávání v rámci metody AHP (analytický hierarchický proces) a byly vytvořeny váhy mapových vrstev. Váhy a faktory byly zpracovány v MCE modulu pro vytvoření konečného plánu přiměřenosti. Celkové náklady na každou z alternativ byly vypočítány z plánu přiměřenosti a byla vyčíslena jejich jednotková cena. Z dosažených hodnot vyplývá, že návrhy 1 a 2 měly nejvyšší, resp. nejnižší cenu. Výsledky práce zároveň ukazují, že využití GIS v kombinaci s multikriteriálním hodnocením zlepšil proces plánování.

Klíčová slova: analytický hierarchický proces; lesní cesta; GIS; multikriteriální hodnocení (MCE); PEGGER

Corresponding author:

EHSAN ABDI, University of Tehran, Faculty of Natural Resources, P.O. Box 31585–3314, Karaj, Iran
tel.: + 98 0261 222 3044, fax: + 98 0261 227 765, e-mail: e_abdi19@yahoo.com
