

## Finite element simulation of temperature variation in grain metal silo

MOHAMMED GANA YISA\*, ADESHINA FADEYIBI\*, O.I.O. ADISA,  
KEHINDE PETER ALABI

*Department of Food, Agricultural and Biological Engineering, Kwara State University,  
Malete, Nigeria*

\*Corresponding author: [adeshina.fadeyibi@kwasu.edu.ng](mailto:adeshina.fadeyibi@kwasu.edu.ng)

### Abstract

Yisa M.G., Fadeyibi A., Adisa O.I.O., Alabi K.P. (2018): Finite element simulation of temperature variation in grain metal silo. Res. Agr. Eng., 64: 107–114.

This research was conducted to study temperature variation in grain metal silo using Finite Element Method (FEM). A mathematical model was developed, based on conductive heat transfer expressed in Poisson and Laplace Differential models, by discretising the actual temperature variation at 8 hours storage interval for 153 days (May to September). The temperature variations were measured from specified radii (0, 3.25 m and 8.25 m) and at depth of 1.2 m from the base of the grain silo. The results of the simulation were compared with the ambient and measured values, and this agreed with each other. The pattern of temperature at the depth of 1.2 m from the radii of the metal silo did not differ from each other. This may imply that the silo will need aeration at an interval of 8 hours to curtail excessive heat build-up that may lead to deterioration of stored grains and possible structural failure.

**Keywords:** finite element; simulation; modelling; temperature variation; grain metal silo

Production of agricultural commodities is seasonal, whereas the food industries require a continuous supply of raw materials (LASZLO, ADRIAN 2009). This gives rise to sophisticated storage and distribution systems. The quality of stored agricultural materials is maintained in storage largely through the control of physical environment, lowering of temperature and water activities so that the biological activity of the potential pests is minimised (JIA et al. 2001). A grain in storage is a human made ecological system in which living organisms and their non-living environment interact. Deterioration of stored grain results from interactions among physical, chemical and biological variables. Principal among the agents that contaminate and destroy stored grains are insects, mites and fungi. The rate of reproduction and growth of these organisms is mostly dependent on temperature and

moisture content of the grains. Heat, moisture and carbon-dioxide are produced by respiration of wet grains; and this is likely to promote the activities of deterioration organisms.

There are three modern methods of storing grains. These are storage in metal silo, warehouse and crib, which is a building usually made from clay with thatch or straws covering. Among these methods, the metal silo is the most preferred, probably due to the long-term protection effect on the stored grains and the sanitary inspection techniques it can offer. Furthermore, metal silos can take different shapes. They could be circular, rectangular, cylindrical or cubical and can be classified into horizontal, in which case the height is less than the diameter, and vertical if the reverse is the case. Metal silo has moisture condensation resulting from temperature fluctuations within the

<https://doi.org/10.17221/101/2016-RAE>

silo and hot spots due to elevated temperatures. Mathematical models can be developed to predict the temperatures and moisture content at various locations in the stored grains. The predictions can be used to decide the location of sensors for detecting spoiled stored grains.

A number of investigations on mathematical models for use in predicting and monitoring the behaviours of some environmental variables with respect to stored grains quality have been reported (CASADA 2000; JIA et al. 2001; LASZLO, ADRIAN 2009). For instance, LASZLO and ADRIAN (2009) reported that the measured grain temperature over a 32-month period agreed with the corresponding predicted values using a finite difference based simulation. CASADA (2000) reported that the interaction of the grain bed with solar heated headspace was higher at the silo wall than at the centre based on his work on the adoption of grain storage model in a 2-D generalized coordinate system to a 2-D cylindrical system. JIA et al. (2001) recommended the application of the simulation method in monitoring the temperature variation within a storage bin. However, these investigations are for discretized problems and cannot be adopted for mixed boundary problems, including solar radiation and air convection. Such continuum problems can be conveniently addressed using the finite element method because of the flexibility, versatility and the ease of analysis it provides.

Temperature distribution of grain in a silo is affected by many factors such as ambient air temperature, air convection, local wind velocity, solar radiation, and silo structure and size. Certain assumptions are made in error during the development of most finite element methods for studying temperature changes in silos (JIA et al. 2002). These include the assumption that convective heat transfer is the only active heat transfer player in the silo. It should be noted that the unaccounted effect of ambient temperature on the bottom layer of the silo is equally of great significance (LO, CHEN 1975; YANG et al. 2002). In this study, the finite element method was used to address these shortcomings with a view to predicting the temperature variation within metal silo. This will enable easy monitoring of likely structural failures due to excessive heat build-up within the silo. Therefore, the objective of this research was to simulate the temperature changes within grain metal silo using the finite element method.

## MATERIAL AND METHODS

**Description and installation of the grain metal silo.** An oxygen limited vertical silo type (Fig. 1), made from corrugated metal sheet, rolled to a curve, bolted together to form a vertical cylinder and anchored to a floor level ring fixed to a concrete pad was used for this investigation. The corrugation profiles are relatively shallow and specially designed to shade the grains without imposing excessive vertical loads on the structure. The vertical stiffeners bearing the vertical loads exerted by the grains are fitted to the outside of the metal silo.

In this study, a 19.0 m cylindrical metal silo with height 11.0 m (Fig. 1) was used. The physical and thermal properties of the material used in making the wall of the silo are: thickness 1.25 mm, density  $780 \text{ kg}\cdot\text{m}^{-3}$ , specific heat capacity  $0.2265 \text{ kJ}\cdot\text{kg}^{-1}\cdot\text{K}^{-1}$ , thermal conductivity  $64 \text{ W}\cdot\text{m}^{-1}\cdot\text{K}^{-1}$  and thermal diffusivity  $0.1393 \text{ m}^2\cdot\text{h}^{-1}$  (SACHDERE 1993). Metal baffles were made in the cylindrical sides of the silo for sample collection, and these were opened only when samples were to be collected. The positions of thermocouples for measuring temperature variation are shown in Fig. 2. The silo was loaded to full capacity (440,000 kg) with maize of a moisture content of 10.5 % (w.b.) with the help of a tractor. All the faces of the silo were exposed to similar ambient conditions by placing them on 1 m concrete raised platform.

**Aerating system and setting.** In order to maintain the quality of maize stored in the silo, aerated grit channel ventilator and fan with flow rate of  $2.3 \text{ m}^3$  and rating 3 kW was fitted allow for aeration. The ventilator was made of mild steel material with  $0.7 \times 0.6 \text{ m}$  dimension. An Internal Sensing Controller was used to rapidly cool the grains to  $15^\circ\text{C}$  and then maintained between  $17\text{--}35^\circ\text{C}$  and 60% relative humidity (RH). The controller turns on the fan when the difference between ambient and internal conditions was closer to the target temperature range specified. Also, the floor of the silo was perforated to allow air inlet for additional aeration and a discharge auger was installed through its centre. In principle, air in the silo heat up during the day and cools up at night to create an avoidable condition for condensation. Thus, without aeration and ventilations, condensation can cause damp patches of grains at the top of the silo, which in turn will provide breeding grounds for insects and mould.

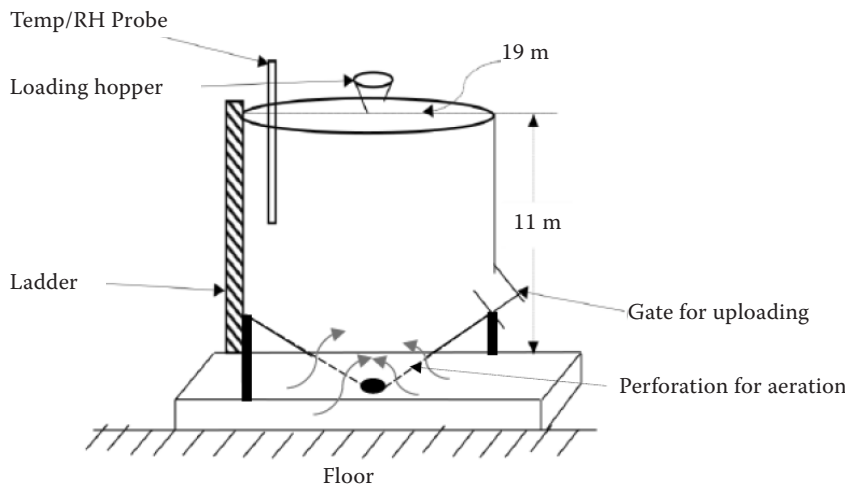


Fig. 1. Cross section of the vertical silo type

**Temperature measurement.** The monitoring of the temperature difference with respect to the ambient condition within and out the silo was carried out using six copper constantan thermocouple probes, inserted at the depth of 1.2 m from the floor and attached at 3.25 m interval from the wall, at six different positions. The wet and dry bulb temperatures were measured using thermometers placed in the silo. An interface of AC converter and control panel arrangement were connected to the six thermocouple probes for data collection. Records of the temperature readings from the thermocouple probes were noted after every 8 hours of storage which lasted for 153 days (May to September).

**Mathematical model development.** A section of the cylindrical grain metal silo was divided into a finite number of spatial elements in radial direction, as shown in Fig. 2. The conductive heat transfer models, expressed in Poisson and Laplace dif-

ferential equations, were adopted and used as the guiding principle in this investigation.

$$\nabla^2 + \frac{q}{k} = 0 \rightarrow K \nabla T \quad \text{conduction}$$

$$\nabla T = \frac{q}{hA} \rightarrow q = \nabla T h A \quad \text{convection}$$

$$Q = I b v + I d \quad \text{radiation}$$

Total heat transfer is therefore:

$$Q_t = K V^2 T + V T + h_c 2 \pi r l (T_s - T_{air}) + I b l v + I d$$

where:  $K$  – thermal conductivity;  $\nabla T$  – temperature gradient in two dimensions;  $h_c$  – heat capacity ( $\text{J} \cdot \text{kg}^{-1} \cdot \text{K}^{-1}$ );  $r$  – base radius of the silo (m);  $l$  – height of the silo (m);  $T_s$  – internal temperature of the silo (K);  $T_{air}$  – temperature of the surrounding or outside air (K);  $s$  – Stefan-Boltzmann constant ( $5.6704 \times 10^{-8} \text{ W} \cdot \text{m}^{-2} \cdot \text{K}^{-4}$ );  $b$  – width of the silo (m)

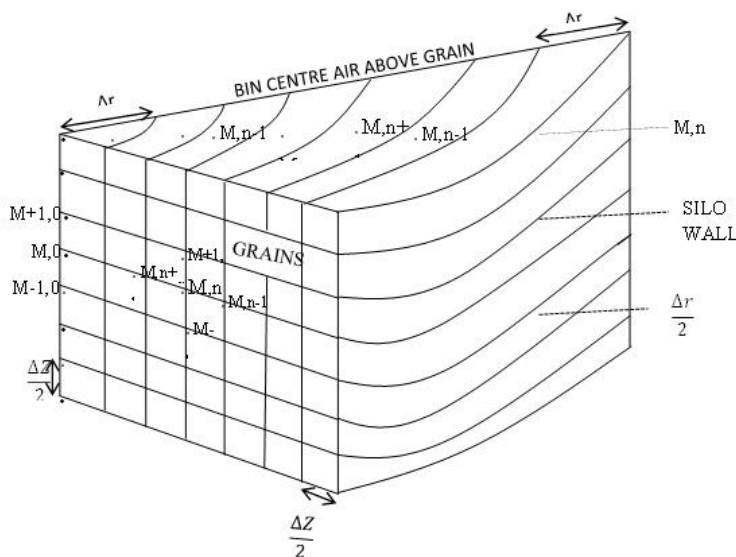


Fig. 2. Finite element of spatial arrangement in grain metal silo

<https://doi.org/10.17221/101/2016-RAE>

However, general differential equation of heat flow in two dimensions in a cylindrical system (SMITHIES et al. 1952; CARSLow, JAEGER 1959) is given as:

$$\frac{\delta T}{\delta t} = \alpha \left[ \frac{\delta^2 T}{\delta r^2} + \frac{1}{r} \frac{\delta T}{\delta r} \frac{\delta^2 T}{\delta y^2} \right] \quad (1)$$

$$T(r,y,t) = T_i(r,y) \text{ for } t = 0$$

where:  $T_i$  – the initial grain temperature

Meanwhile, the heat transfer by conduction was computed using Eq. (3).

$$\alpha = \frac{K_g}{\rho C_p}$$

where:  $\alpha$  – thermal diffusivity;  $K_g$  – thermal conductivity;  $\rho$  – bulk density;  $C_p$  – specific heat capacity;  $T$  – temperature of stored grains and is a function of independent variables of  $r$  and  $y$  at  $r$ - $y$  plane;  $r$ ,  $y$  – radial and vertical coordinates of the cylindrical storage silo;  $t$  – time

Now, considering the boundary conditions where the convective heat transfer coefficient and ambient temperature exist in Fig. 2, the expression in Eq. (4) was used to compute the heat transfer in the silo due to convection.

$$K_g \left[ \frac{\delta T}{\delta r} + \frac{\delta T}{\delta y} \right] + h_c [T - T_a] = 0 \quad (2)$$

The temperature at any point  $T_m$ , which is discretized in time. Subscript  $p$  was used to denote time dependence of  $T$ , and the time derivative is expressed in terms of the difference in temperatures associated with the new ( $p + 1$ ) and previous ( $p$ ) times. Hence calculations are performed at successive times separated by interval  $\Delta t$ . The explicit form of finite difference of Eq. (2) for the interior mode  $m, n$  of the storage silo is:

$$\frac{1}{\alpha} \left[ \frac{T_{m,n}^{p+1} - T_{m,n}^p}{\Delta t} \right] = \left[ \frac{T_{m+1,n}^p + T_{m-1,n}^p - 2T_{m,n}^p}{\Delta r^2} \right] + \frac{1}{m\Delta P} \left[ \frac{T_{m+1,n}^p - T_{m,n}^p}{\Delta r} \right] + \left[ \frac{T_{m,n+1}^p + T_{m,n-1}^p - 2T_{m,n}^p}{\Delta y^2} \right] \quad (3)$$

Solving for the nodal temperature at the new ( $p + 1$ ) time and assuming that  $\Delta r = \Delta y$ :

$$T_{m,n}^p = F_0 \left[ T_{m+1,n}^p \left( 1 + \frac{1}{m} \right) + T_{m-1,n}^p + T_{m,n+1}^p + T_{m,n-1}^p \right] + T_{m,n}^p \left[ 1 - F_0 \left( 4 + \frac{1}{m} \right) \right] \quad (4)$$

where:  $F_0$  – finite-difference form of the Fourier number

$$F_0 = \frac{\alpha \Delta r}{\Delta t}$$

However, using L' Hospital's rule Eq. (1) can be transformed into:

$$\lim_{r \rightarrow 0} \left( \frac{1}{r} \frac{\delta T}{\delta r} \right) = \frac{\delta^2 T}{\delta y^2}$$

Therefore, Eq. (1) for the centre of the silo can be written as:

$$\frac{\delta T}{\delta t} = \alpha \left( \frac{\delta^2 T}{\delta r^2} + \frac{\delta^2 T}{\delta y^2} \right) \quad (5)$$

For centre of the silo, where  $r = 0$  ( $m = 0, n = 0$ ) at new time ( $p + 1$ ) is:

$$T_{0,0}^{p+1} = F_0 \left( 4T_{1,0}^p + T_{0,1}^p + T_{0,-1}^p \right) + T_{0,0}^p (1 - 6F_0) \quad (6)$$

In practice, the surface temperature changes with variation of the outside temperature. LO and CHEN (1986) reported that for point on outside surfaces which are exposed to convective conditions, the finite difference equation must be obtained by applying the energy balance method to a control volume about that node. As a result of this, the finite difference form of the Eq. (1) for the surface points with specified convective boundary condition at the new time ( $p + 1$ ) is given as:

$$T_{m,n}^{p+1} = F \left[ 2T_{m-1,n}^p + T_{m,n-1}^p + T_{m,n+1}^p + \frac{2B_1 T_a^p}{1 + (h_c L_w / K_w)} \right] + \left[ 1 - 4F_0 - \frac{2F_0 B_1}{1 + (h_c L_w / K_w)} \right] T_{m,n}^p \quad (7)$$

where:  $K_w$  – thermal conductivity of the silo wall ( $W \cdot mK^{-1}$ );  $L_w$  – thickness of the silo wall (m);  $T_a^p$  – ambient temperature at time,  $p$  ( $^{\circ}C$ );  $B_1$  – the finite-difference form of the Biot number and is given as:

$$B_1 = \frac{h_c \Delta r}{K_g}$$

The finite element computer program was developed to solve Eq. (7). The input data are the node and element, boundary condition, thermal properties of grain, air and storage material, initial temperature of every node in the domain, outside temperature and the thickness of the silo wall. The nodal temperature for the new time is determined exclusively by known nodal temperatures for the

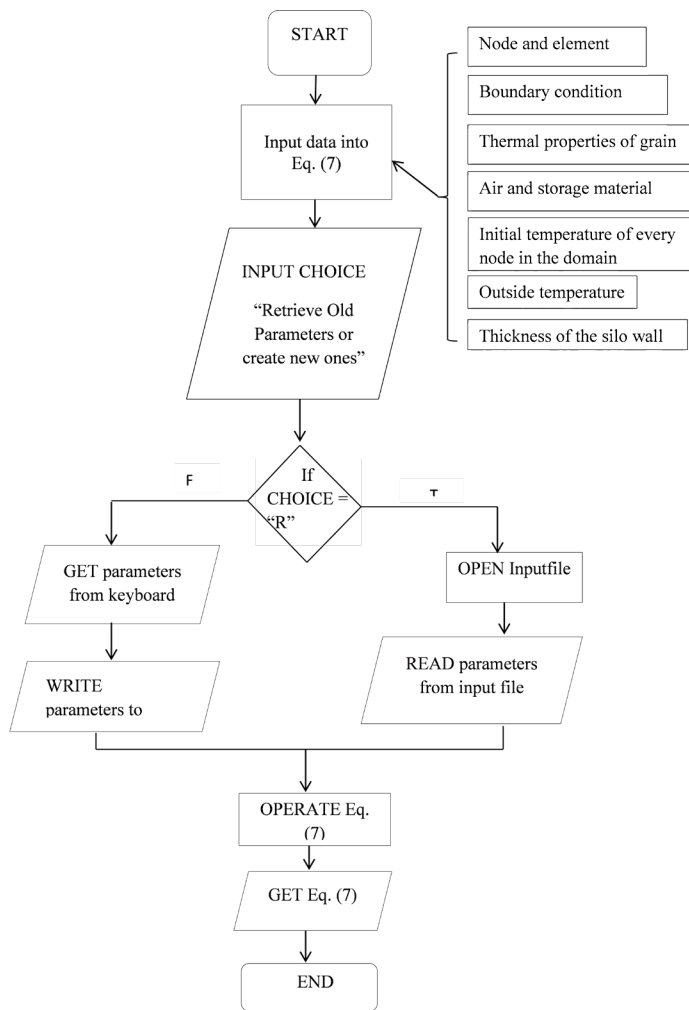


Fig. 3. Grain metal silo simulation protocol

previous time. In this way, the transient temperature distribution was obtained by successively incrementing  $t$  by  $\Delta t$ . By repeating this procedure, the temperature distribution within the silo was computed.

### Development and execution of simulation protocol

The deterioration of grains in metal silo is usually associated with a lot of energy emissions in the form of temperature. This realisation was used as a basis for simulating the model developed in this investigation. Thus, in order to take care of sudden increases in temperature within the silo, the model was designed to predict temperature slightly higher than both the measured and ambient temperature values. A flow diagram of the simplified version of the simulation protocol is shown in Fig. 3. The measured temperature data were used as in-

put data for the simulation exercise, which started during the rainy season and lasted for five months (May to September). Based on the input parameter controlling the fan operation, the grains boundary conditions were determined using forced convection sub routines at the appropriate time interval. The finite element model expressed in Eq. (7) was thereafter used to predict the temperature from the centre and radii (3.25 and 8.25 m) of the metal silo.

### RESULTS AND DISCUSSION

Temperature variations within the grain metal silo over 5 months (May to September) period of storage have been studied using finite element method. Regardless of the radius and depth of the silo, the ambient, measured and simulated temperature values increased with storage period from the months of May to September (Figs 4 and 5). The responses of the finite element model developed

<https://doi.org/10.17221/101/2016-RAE>

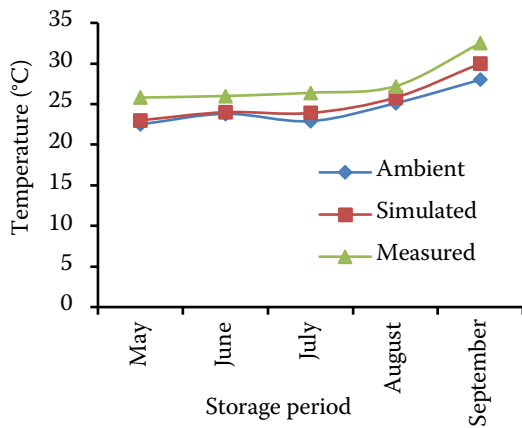


Fig. 4. Validation of model for predicting silo temperature change at the centre and at a depth of 1.2 m

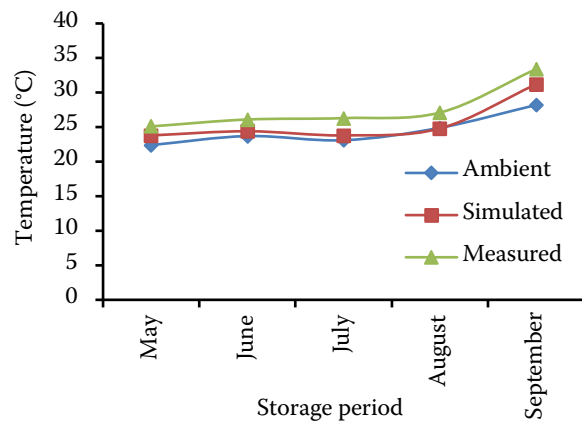


Fig. 5. Validation of model for predicting silo temperature change at depth of 1.2 m and radius of 3.25 m from centre

for predicting the temperature changes, from the months of May to September, were comparable with the ambient and measured values from the specified radius (0, 3.25 m and 8.25 m) and at a depth of 1.2 m from the base of the silo (Figs 5 to 7). For both the centre and radii locations, the simulated temperatures followed the measured values more closely at 1.2 m depth. The model predicted that the temperatures at 1.2 m location increased from May through the end of September in comparison with the measured temperatures values. This may probably be associated with heat of respiration of the grains together with the accumulated heat gain during the day and long hours of sunshine. The variation occurring from July to the start of dry season (September) might be responsible for the slight temperature build up in September.

It is also important to note that the pattern of temperature at the depth of 1.2 m from all the

specified radii of the silo did not differ from each other. For instance, the difference between the measured and ambient temperature from the corresponding simulation value was less than 5°C, as is shown in Figs 6 and 7. This implies that the finite element model can be relied upon for predicting the temperature variations within the storage silos and the interactive effects imposed by the ambient condition. In a related investigation, AL-ABADAN (2006) applied the finite difference model in 2-D, to predict the influence of bin diameter on the temperature variations within maize bulk storage. The author reported that the ambient temperatures during the dry season were higher than the wet season. LAWRENCE et al. (2013) also agreed with our findings, in their investigation on the application of 3-D transient heat, mass, momentum, and species transfer in the stored grain ecosystem, that grain surface temperature within the silo was

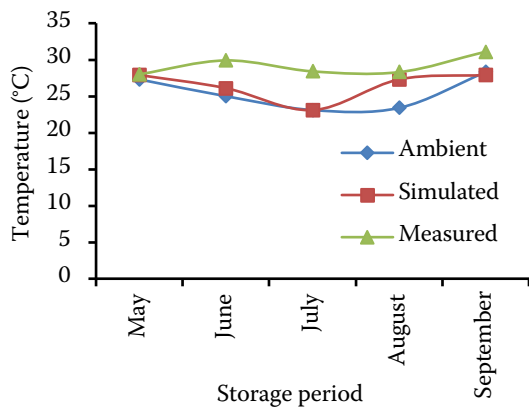


Fig. 6. Validation of model for predicting silo temperature change at depth of 1.2 m and radius of 8.25 m from centre

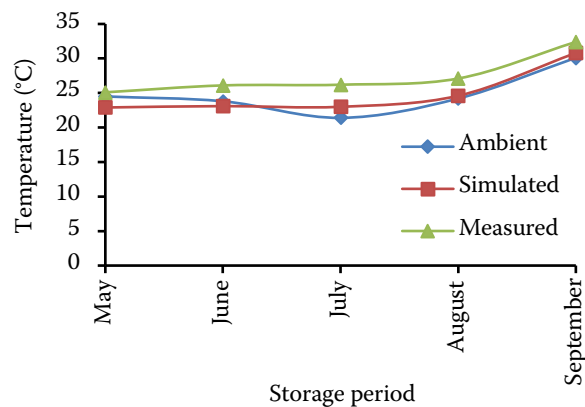


Fig. 7. Validation of model for predicting silo temperature change at the centre and depth of 1.2 m

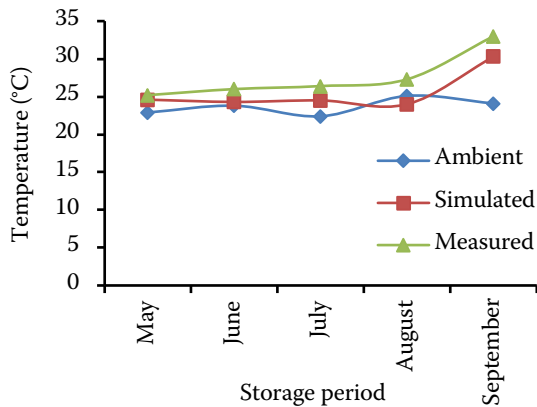


Fig. 8. Validation of model for predicting silo temperature change of 1.2 m and radius of 3.25 m from the internal wall

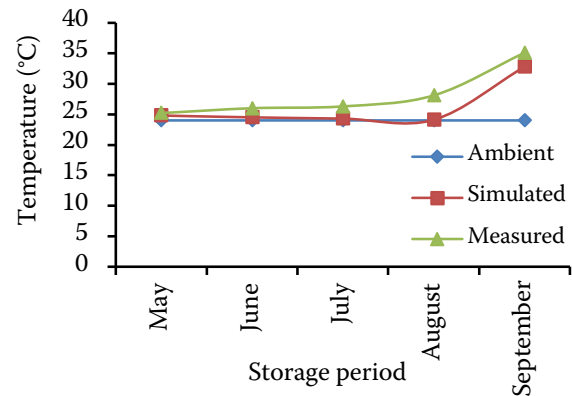


Fig. 9. Validation of model for predicting silo temperature change at a depth of 1.2 m and radius of 8.25 m from the internal wall

higher than the ambient by 5°C. Also, the research result of LAWRENCE and MAIER (2012) was in line with our findings as the authors reported a difference of 4°C between the different configurations of the cone used for maize storage.

Fig. 8 and Fig. 9 indicate that the temperature near the silo wall and at the 8.25 m was still higher than that in the bin centre and at 3.25 m when the ambient temperature began to rise in September. Should this not adequately and effectively be corrected during the period of storage, the high temperature incidence within the metal silo can cause the stored grains to spoil. The higher silo temperatures near the wall and at radius of 8.25 m might have been influenced by solar radiation between the silo roofing and surface layer. Thus, in order to avoid this from happening, vents are usually made through the silo walls or roof for the excess heat to escape (LASZLO and ADRIAN 2009). The research results of ZHANG et al. (2016) corroborated our findings in their work on temperature variation in small grain steel silos. Furthermore, the variation in the temperature within the metal silo can cause pressure build up in horizontal direction, just around the wall of the storage silo. In the view of MORAN et al. (2012), the increment in the pressure developed is much experienced as variation in temperature increased. The implication of the present research results is that since there is no much difference between the measured and ambient air temperatures from the simulated, the overall effect can only result in lower pressure build up within the silo to such an extent that structural failure is not envisaged.

## CONCLUSION

The temperature variation in the grain metal silo was investigated using finite element method (FEM). By taking temperature measurements at interval of 8 hours for 153 days from January to September, a mathematical model was developed and used to simulate the temperature behaviour within the silo. The results of the simulation were compared with the ambient and measured values from specified radii (0, 3.25 m and 8.25 m) and at depth of 1.2 m from the base of the grain silo. The simulated results agree with the measured and ambient temperature data. The pattern of temperature at the depth of 1.2 m from the radii of the metal silo did not differ from each other. This may imply that the silo will need aeration at an interval of 8 hours to curtail excessive heat build-up that may lead to deterioration of stored grains and possible structural failure.

## References

- Alababan B.A. (2006): Temperature changes in bulk stored maize. *AU Journal of Technology*, 9: 187–192.
- Casada M.E. (2000). Adapting a grain storage model in a 2-D generalised coordinate system. *ASAE Annual International Meeting*: 1–14.
- Carslaw H.S., Jaeger J.C. (1959): *Conduction of Heat in Solids*. 2nd edition. Clarendon Press, Oxford.
- David F.G. (1986): *Dynamics of viscoelastic studies: a time domain finite element formulation*. UTIAS report, No. 301. Institute for Aerospace studies, University of Toronto, XI.

<https://doi.org/10.17221/101/2016-RAE>

- Jia C., Suna D. W., Caob C. (2001): Computer simulation of temperature changes in a wheat storage bin. *Journal of Stored Products Research*, 37: 165–177.
- Laszlo R., Adrian T. (2009): Simulation of changes in a wheat storage bin regarding temperature, *Analele Universității Din Oradea, Fascicula: Protecția Mediului*, 14: 239–244.
- Lawrence J., Maier D.E., Strohshine R.L. (2013): Three-dimensional transient heat, mass, momentum, and species transfer in the stored grain ecosystem: Part II. Model validation. *Transaction of the American Society of Agricultural and Biological Engineering*, 56, 181–201.
- Lawrence J., Maier D. E. (2012): Prediction of temperature distributions in peaked, Leveled and inverted cone grain mass configurations during aeration of corn. *Applied Engineering in Agriculture, American Society of Agricultural and Biological Engineers*, 28: 685–692.
- Lo K.M., Chen C.S. (1975): Simulation of temperature and moisture changes in wheat storage due to weather variability. *Journal of Agricultural Engineering Research*, 20: 47–53.
- Moran J. M., Aguado P. J., Ayuga F., Guaita M., Juan A. (2012): Effects of thermal loads on agricultural silos. In: 15<sup>th</sup> ASCE Engineering Mechanics Conference, June 2–5, Columbia University, New York: 1–8.
- Sadhare R.C. (1993). *Fundamentals of Engineering Heat and Mass Transfer*. India, Wiley, Eastern Limited.
- Yang W., Jia C.C., Siebenmorgen T. J., Howell T. A., Cnossen A. G. (2002): Intra–kernel moisture responses of rice to drying and tempering treatments by finite–element simulation. *Transaction of the American Society of Agricultural and Biological Engineering*, 45: 1037–1044.
- Zhang L., Chen X., Liu H., Peng W., Zhang Z., Ren G. (2016): Experiment and simulation research of storage for small grain steel silo. *International Journal Agricultural and Biological Engineering*, 9: 170–178.

Received for publication October 27, 2016

Accepted after corrections November 7, 2017